


**ROCHCOAT BLANC**  
FOLDING BOXBOARD  
(FBB) WITH WHITE BACK  
GC 1

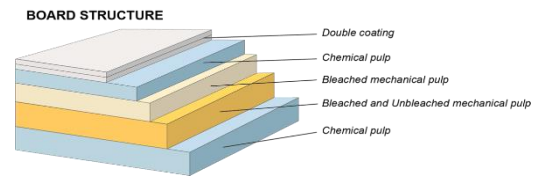

**TECHNICAL SPECIFICATION**

GRAMMAGE	CALIPER	BULK	STIFFNESS TABER *(15°)		STIFFNESS L&W *(5°)	
			MD	CD	MD	CD
ISO 536	ISO 534	ISO 534	ISO 2493		DIN 53121	
<b>g/m<sup>2</sup></b>	<b>µm</b>	<b>cm<sup>3</sup>/g</b>	<b>mNm</b>	<b>mNm</b>	<b>mNm</b>	<b>mNm</b>
(230)	370	1.61	10.7	4.5	20.1	8.7
250	410	1.64	14.5	5.9	27.1	11.3
275	460	1.67	18.9	8.0	35.3	15.3
(300)	505	1.68	24.2	10.8	45.2	20.8

() NON-STANDARD GRAMMAGE, AVAILABLE ON SPECIAL REQUEST ONLY.

(\*) L&W FIGURES ARE GUARANTEED. TABER FIGURES ARE INDICATIVE.

BRIGHTNESS (AT PRODUCTION)		
TOP	90%	ISO 2470-2
BACK	84%	ISO 2470-2

COBB		
COBB TOP/BACK 60'	50 g/m <sup>2</sup>	ISO 535

TOLERANCES (*)		
GRAMMAGE	+/- 3%	ISO 536
CALIPER	+/- 5%	ISO 534
STIFFNESS L&W(5°)	- 15%	DIN 53 121
BRIGHTNESS TOP / BACK	+/- 2	ISO 2470-2
COBB TOP/BACK 60'	+/- 20 g/m <sup>2</sup>	ISO 535
TEST CONDITIONS	<b>T: 23° C +/- 1</b>	<b>RH: 50% +/- 2</b>
ROBINSON TEST (TAINT)	<1	NF EN 1230-2

(\*) BASED UPON 95% OF THE MEASURED VALUES BEING IN TOLERANCE

THE MATERIAL IS NOT GUARANTEED FOR BLISTER PACKAGING, LAMINATION AND REVERSE PRINTING

THE BOARD CHARACTERISTICS ARE GUARANTEED 12 MONTHS

CERTIFICATIONS AVAILABLE: ISO 9001 – ISO 50 001

FSC SGSCH-COC-110056 - PEFC™ FCBA-06-00771

Version 12 – Fev-24